


**ASM25 MD
(ALU)-FP**

- Linear diffusers
- Aluminium

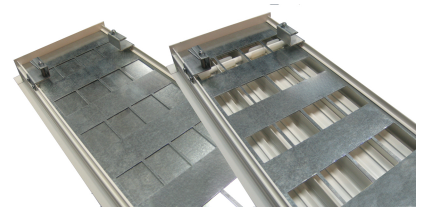

Anodized linear slot diffusers type ASM25 MD (ALU)-FP

Anodized linear slot diffusers with adjustable deflectors and dampers

Application

- For air supply or exhaust in ventilation and air conditioning systems.

Material

- Aluminium

Colour

- Anodized finishing
- Standard deflector in diffuser colour. Black deflector is optional

Mounting

- Ceiling mounted

Accessories

- Non-insulated plenum box, type **PR25**
- 2-sides insulated plenum box, type **PR125**
- Corner piece 90°, type **ASM K90**
- Connection piece, type **ASM-CON** for in-line mounting

Text for tender

- The air diffusers are of the linear type with deflector and damper. They are made of aluminium finished anodized and can be supplied with a non-insulated plenum box.
- **Cairox** type **ASM25 MD**

Other available products

- Type **ASM25** (without deflector or volume control damper), **ASM25 D** (without deflector) or **ASM25 M** (without volume control damper) available upon request

Order example

- **ASM25 MD, FP 2, 1500**

Explanation

ASM25 MD 2 = Diffuser type in anodized aluminium

2 = Slot quantity


MD = With deflectors and damper

1500 = Length of diffuser


Accessories (optional)

PR25 2 1500 = Not-insulated plenum box for diffuser of 2 slots with a length of 1500mm

ASM25-CON = Connection piece to mount several diffusers in line
Note: Can also be delivered in RAL 9016

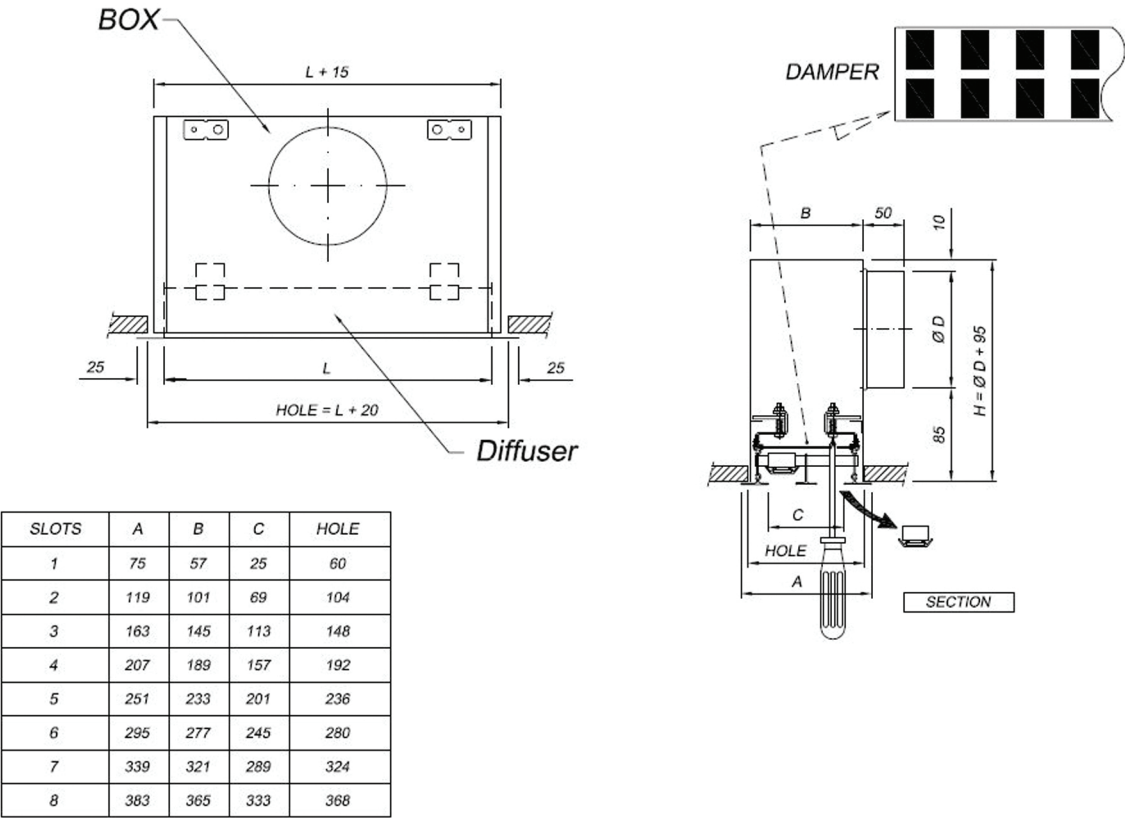

Flow patterns deflectors

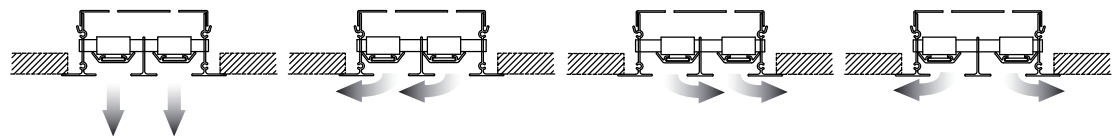

Placement instruction

