


**ASM25-W MD
(RAL9016)-FP**

- Slot difusers
- Aluminum

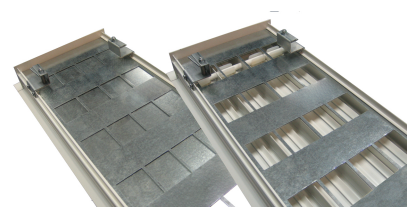

White linear slot diffusers type ASM25-W MD (RAL9016)-FP

Anodized linear slot diffusers with adjustable deflectors and dampers

Application

- For air supply or exhaust in ventilation and air conditioning systems.

Material

- Aluminium

Colour

- White RAL 9010
- Standard deflector in diffuser colour. Black deflector is optional

Mounting

- Ceiling mounted

Accessories

- Non-insulated plenum box, type
- 2-sides insulated plenum box, type
- Corner piece 90°, type **ASM K90**
- Connection piece, type **ASM-CON** for in-line mounting

Text for tender

- The air diffusers are of the linear type with deflector and damper. They are made of aluminium finished anodized and can be supplied with a non-insulated plenum box.
- Cairox** type **ASM WMD**

Other available products

- Type **ASM** (without deflector or volume control damper), **ASM D** (without deflector) or **ASM M** (without volume control damper) available upon request

Order example

- ASM25-W MD 2 L=1500 (RAL9016)-FP**

Explanation

ASM25-W,MD 2 = Diffuser type in anodized aluminium

2 = Slot quantity


MD = With deflectors and damper

1500 = Length of diffuser


Accessories (optional)

PR25 2 1500 = Not-insulated plenum box for diffuser of 2 slots with a length of 1500mm

ASM25-CON = Connection piece to mount several diffusers in line

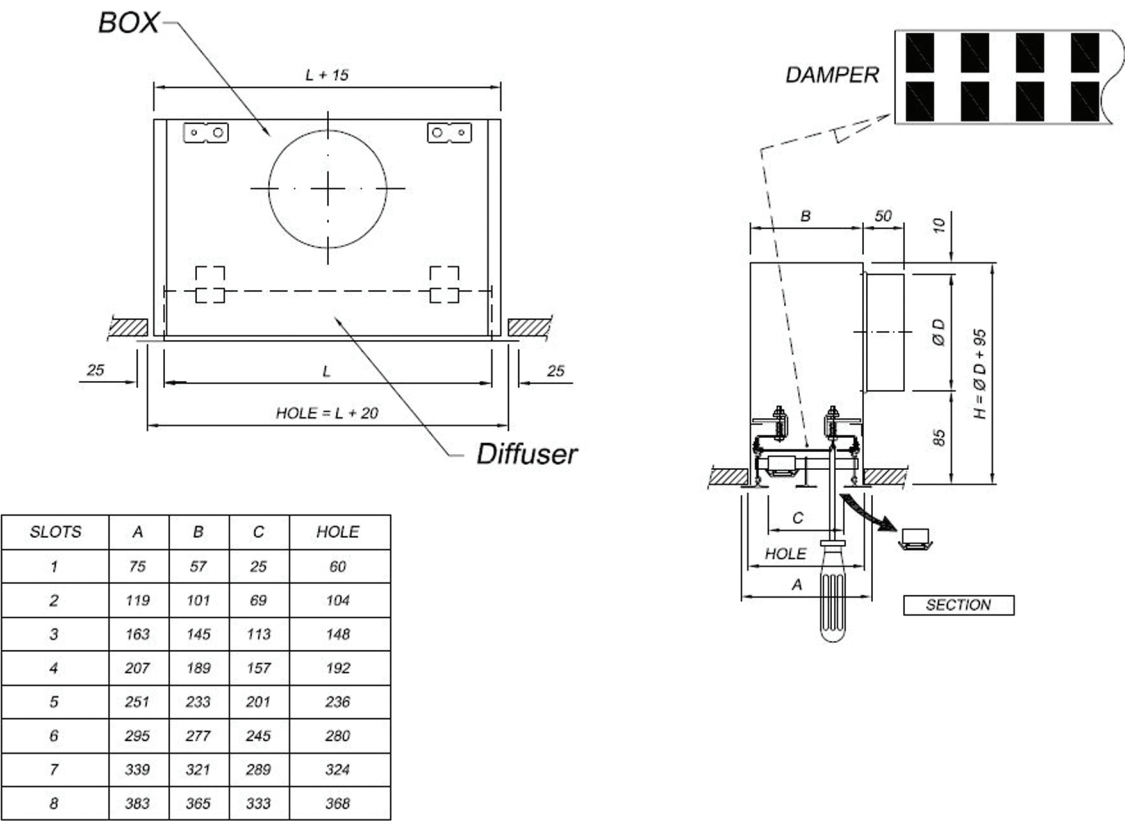

Flow patterns deflectors

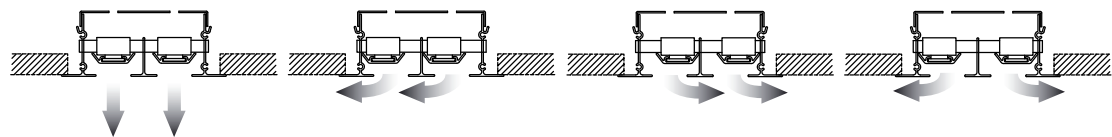

Placement instruction

