

C.03

Synthetic duct and fitting

PB 125-3/75

Plenum 3 x Ø75 mm 125 mm

Plenum Ø 125-3x75 type PB 125-3/75

The plenum box is used to connect three flexible ducts to the distribution boxes. Thanks to the possibility of supplying three ducts, it is recommended for mounting air valves in rooms requiring intensive ventilation, e.g. kitchen, bathroom or toilet. The high air flow efficiency of the PB125-3 box makes it possible to achieve increased ventilation parameters without having to drill additional holes in the ceiling.

Brand

Cairox

Application

- The design of the plenum box allows it to be mounted on different surfaces and in different planes. The Ø75 mm female connectors are equipped with a gasket and special protection of the connected ducts, which ensures the tightness of the entire system in the high D class.

 Mounting of the box is facilitated by brackets allowing for the installation height
- adjustment that adapts to the place of installation. They guarantee the quick and easy installation of the plenum boxes in the system.

 It is possible to install them on floor / wall / ceiling: made of concrete or
- plasterboard.

Composition

- Made of durable HDPE (High Density Polyethylene) material;
- The robust structure guarantees failure-free operation;
- High level of bacteriostatic activity, using Nano Silver as additive.


Features and benefits

- Air tightness of the entire system in the high D class;
- Multiple ways for installation;
- Bacteriostatic treatment, Nano Silver;
- Height adjustment.



Synthetic duct and fitting

Selection curves

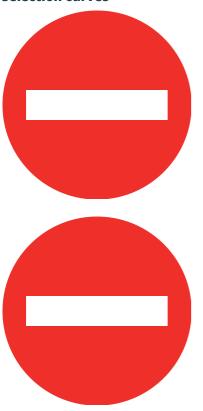

Dimensions - circular						
ø1	ø2	ø3	A	В	Z	W
75 mm	128 mm	134 mm	268 mm	195 mm	257 mm	152 mm