



Fan box 400 degr - 2h type CFV


Centrifugal fan for smoke exhaust F400/120 (400C/2h) with forward curved blades.
From 1000 to 67000 m³/hr up to 3000 Pa

Application

- Smoke exhaust for industrial and residential premises
- Kitchen exhaust systems
- Simple ventilation of tertiary and industrial applications

Composition

- The casing is made from rigid panels, with an access door on the transmission side, easy to dismantle
- Double inlet fan mounted on a frame
- Flexible rectangular connector on exhaust with a flange of 30 mm
- Galvanised steel casing
- Three phase motor, 400V/50Hz, IP 55, F class, with one or two speeds

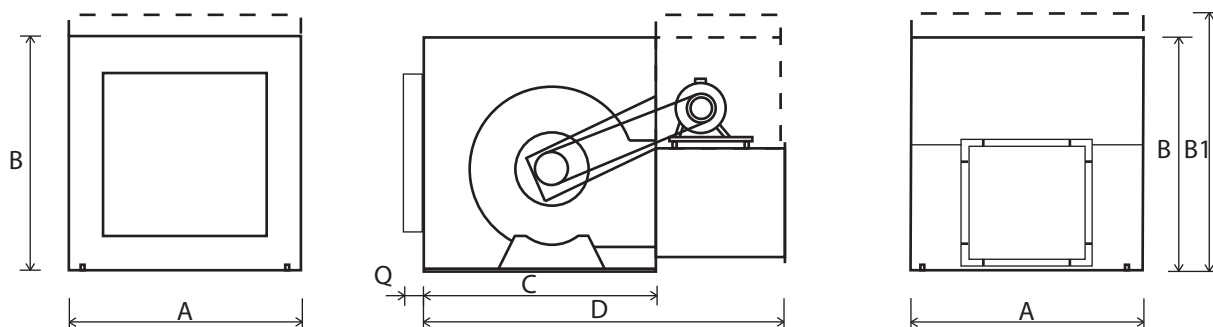

Dimensions							
CFV A	A[mm]	B [mm]	B1** [mm]	C [mm]	D [mm]	S.C [kg]	D.C [kg]
200	630	630	710 ≥ (100)	659	1070	50	85
250	630	630	796 ≥ (100)	659	1070	50	89
315	950	1000	-	1057	1600	50	109
355	950	1000	1052 ≥ (100)	1057	1600	50	2215
400	1150	1150	-	1207	1750	6	305
450	1150	1150	1213 ≥ (100)	1207	1750	65	315
500	1390	1300	-	1357	1900	65	4665
560	1390	1300	1379 ≥ (100)	1357	1900	65	486
630	1680	1850	-	1787	2830	80	829
710	1680	1850	2000 ≥ (100)	1787	2830	80	920