



Wall fans type ICON

Mixed centrifugal/axial wall and ceiling fan

Application

- Wall and ceiling mounting
- Ideal for toilets, en-suites, shower rooms, utility, bathrooms, domestic kitchens and residents lounges.

Composition

- Axial impeller or centrifugal/axial impeller
- Supply: 230V/1PH/ 50Hz
- Unique iris shutter
- 12V DC low energy, low watt, long life
- Splashproof, tiling friendly, wipe clean cover


Models

- **ICON 15** Ideal for use in toilets, en-suites, shower rooms and bathrooms with a flow rate up to 76m³/hr. Axial impeller. Mounting (Wall/Ceiling): Recessed
- **ICON 30** Ideal for use in larger toilets, bathrooms and utility rooms with flow rate up to 118m³/hr. Mixed centrifugal/axial impeller. Mounting (Wall/Ceiling): Recessed and surface
- **ICON 60** Ideal for use in large bathrooms, kitchens and Utility rooms with a flow rate up to 260m³/hr. Mixed centrifugal/axial impeller. Mounting (Wall/Ceiling): Recessed and surface

Accessories

- Timer module type **ICON-T**
- Pull cord module type **ICON-PC**
- Humidity & timer module type **ICON-HT**
- Infrared & timer module type **ICON-IRT**
- Infrared & humidity & timer module type **ICON-IRHT**

	Technical data			
	QV [m ³ /h]	Lp @3m [dB(A)]	P [W]	U [V]
Icon 15	76	35	14.50	230V1PH/50Hz
Icon 30	118	34.50	30	230V1PH/50Hz
Icon 60	260	44.50	75	230V1PH/50Hz

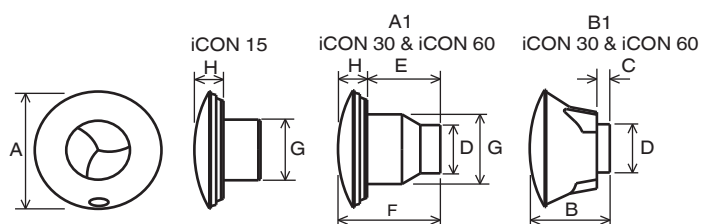

A1 - Recessed mounted
B1 - Surface mounted

	Dimensions							
	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]
Icon 15	197	-	-	-	52	92	100	40
Icon 30	225	141.30	29.40	97.50	100.90	144.30	147.90	43
Icon 60	280	165.40	46.50	147.90	115	170.30	176.80	55