


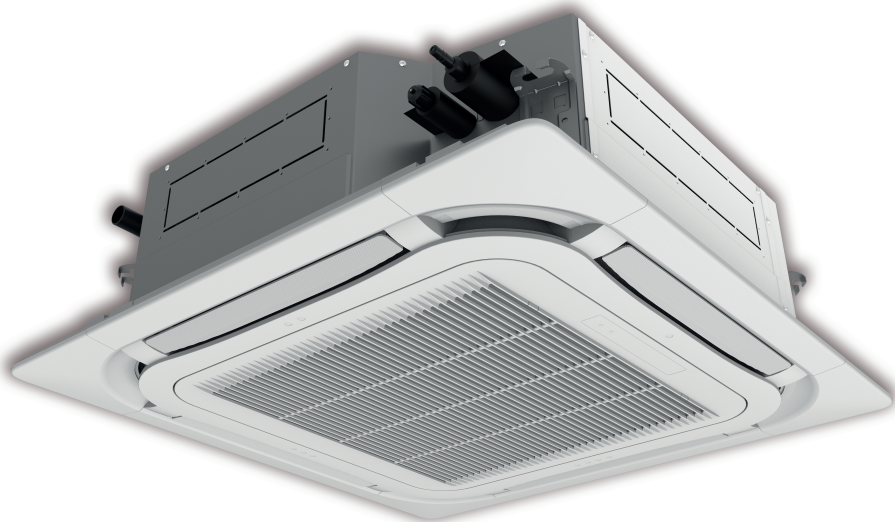

VRF compact 360° cassette indoor unit type CRX-NDTE

- Cassette type VRF indoor unit with low noise design, wired or infrared remote control

Product

- Indoor unit, compact 360° cassette

Application

- **Cooling or Heating** of offices, rooms or shops,...

Function

- Heatpump or Only Cooling, Inverter

Refrigerant

- R410A



Features

- Built-in drain pump
- Washable filter
- Quiet function
- Compact design
- Easier maintainability

Applicable outdoor units

- CRX-WLA
- CRX-WLB
- CRX-WM
- CRX-QWM
- CRX-SWL

			Specifications							
Model			CRX-ND15T/E-T	CRX-ND18T/E-T	CRX-ND22T/E-T	CRX-ND28T/E-T	CRX-ND36T/E-T	CRX-ND45T/E-T	CRX-ND50T/E-T	CRX-ND56T/E-T
Capacity	Cooling	kW	1.5	1.8	2.2	2.8	3.6	4.5	5	5.6
	Heating	kW	1.8	2.2	2.5	3.2	4	5	5.6	6.3
Power supply			220-240V / 1Ph / 50Hz & 208-230V / 1Ph / 60Hz							
Power consumption		W	30	30	30	30	30	45	45	45
Airflow volume (H/M/L)		m³/h	460/420/370	460/420/370	500/460/370	570/480/420	620/550/480	730/650/560	730/650/560	730/650/560
Rated current	Cooling	A	0.15	0.15	0.15	0.15	0.15	0.23	0.23	0.23
	Heating	A	0.15	0.15	0.15	0.15	0.15	0.23	0.23	0.23
Sound pressure level (H/M/L)		dB(A)	33/30/25	33/30/25	36/31/25	36/33/28	39/37/35	43/41/39	43/41/39	43/41/39
Connecting pipe diameter	Liquid	mm	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø9.52
	Gas	mm	Ø9.52	Ø9.52	Ø9.52	Ø9.52	Ø12.7	Ø12.7	Ø12.7	Ø15.9
Drain pipe	External diameter	mm	Ø25	Ø25	Ø25	Ø25	Ø25	Ø25	Ø25	Ø25
	Thickness	mm	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Main body	Dimensions (W x D x H)	mm	570 x 570 x 265	570 x 570 x 265	570 x 570 x 265	570 x 570 x 265	570 x 570 x 265	570 x 570 x 265	570 x 570 x 265	570 x 570 x 265
	Weight	kg	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
Panel	Dimensions (W x D x H)	mm	620 x 620 x 47.5	620 x 620 x 47.5	620 x 620 x 47.5	620 x 620 x 47.5	620 x 620 x 47.5	620 x 620 x 47.5	620 x 620 x 47.5	620 x 620 x 47.5
	Weight	kg	3	3	3	3	3	3	3	3

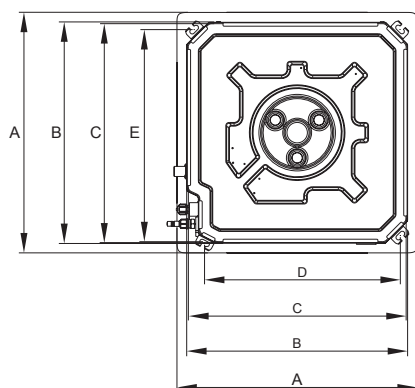

	Dimensions						
	A	B	C	D	E	F	G
CRX-ND15T/E-T	620	580	570	505	550	295	180
CRX-ND18T/E-T	620	580	570	505	550	295	180
CRX-ND22T/E-T	620	580	570	505	550	295	180
CRX-ND28T/E-T	620	580	570	505	550	295	180
CRX-ND36T/E-T	620	580	570	505	550	295	180
CRX-ND45T/E-T	620	580	570	505	550	295	180
CRX-ND50T/E-T	620	580	570	505	550	295	180
CRX-ND56T/E-T	620	580	570	505	550	295	180