

- Condensate pump with remote float
- Eckerle



Condensate pumps type EE1000

The slim condensate pump Pumpkin10 with a separate 2-stage detection block is very convenient for installation in a mounting duct thanks to its small dimensions. The 2-stage detection block switches the pump on/off.

The condensate pump Pumpkin10 consists of a pump, a detection block, vibration dampers and mounting material.

Application

- Split units up to 10 kW

Specifications


- Max. flow rate: 10 l/h
- Max. head of the discharge: 10 m
- Max. length of suction side: 1,5 m
- Noise level: 27 dB
- Alarm contact: 230 VAC, 8A - NO/NC

Mounting

- Directly on the drainage hose
- On the drainage of the condensate tray

Dimensions

- Pump (L x W x H) : 77 x 37,5 x 62 mm
- Detection block (L x W x D): 82 x 39 x 39 mm

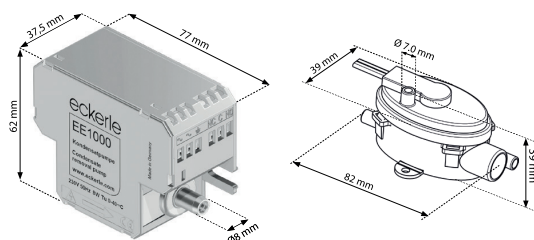

Technical data

- Supply voltage: 230 V AC
- Power consumption: 8 W (operation) and 1 W (standby)
- Thermal protection: 100°C

Technical drawing

