



## Mounting frame type MF-STD

Modular support system made of galvanized steel to support large condensor units, VRF outdoor units, chillers and air handling units.

### Application

- Suitable to support VRF outdoor units, chillers and air handling units
- Secure construction for heavy loads
- When more smaller condensor units are mounted back to back on the support, it is advised to verify the minimum distance within the installation manual of the units

### Composition

Available with 4,6 or 8 feet depending on the configuration.

- MF-STD-4 1200x1000: 4 feet, 2 feet support rails of 1000 mm, 2 support rails of 1200 mm
  - MF-STD-6 1200x2000: 6 feet, 2 feet support rails of 2000 mm, 4 support rails of 1200 mm
  - MF-STD-8 1200x3000: 8 feet, 2 feet support rails of 3000 mm, 6 support rails of 1200mm
- MF-STD-4 1500x1000: 4 feet, 2 feet support rails of 1000 mm, 2 support rails of 1500 mm
- MF-STD-6 1500x2000: 6 feet, 2 feet support rails of 2000 mm, 4 support rails of 1500 mm
- MF-STD-8 1500x3000: 8 feet, 2 feet support rails of 3000 mm, 6 support rails of 1500mm
- Height-adjustable feet of 300 x 300 mm, made of fibreglass-reinforced plastic. Height adjustment between 228 and 353 mm by M24 galvanized steel bolts and threaded rod.
- Antivibration rubber mat of size 300 X 300 mm fixed under the feet to prevent damage of the roof or floor surface and to give vibration attenuation.
- Galvanized steel rails of 41 X 41 x 2.5mm with plastic protection caps on the extremities, to prevent injury.
- Kit with all bolts, brackets and nuts included, except for the fixation of the unit.

### Specifications

- **MF-STD-4 1200x1000:** max. support weight up to 500 kg
- **MF-STD-6 1200x2000:** max. support weight up to 1000 kg
- **MF-STD-8 1200x3000:** max. support weight up to 1500 kg
- **MF-STD-4 1500x1000:** max. support weight up to 400 kg
- **MF-STD-6 1500x2000:** max. support weight up to 800 kg
- **MF-STD-8 1500x3000:** max. support weight up to 1200 kg

### Order Example

#### ■ MF-STD-4 1200x1000


Explanation

MF-STD: Mounting frame with feet and antivibration rubber mat


-4: feet

Length of the support rails = 1000 mm


-B 1200: Width of the support rails = 1200 mm



**MF-STD-4**

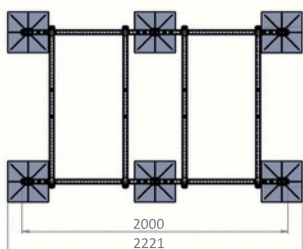

**MF-STD-6**

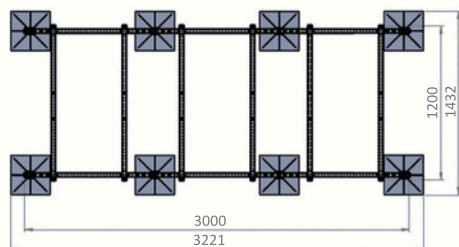

**MF-STD-8**

