



Air curtains for surface mounting type SOLANO EASY PRO

Air curtain with a length of 1 m, 1,5 m or 2 m for door heights up to 3,2 m. Available in versions with electric coil (E), hot water coil (W) or no heating (N). The unit can be placed horizontally above the doorway or vertically next to the doorway by means of the supplied wall brackets. **S-TOUCH** control via an external control module **S-ECM** is mandatory to guarantee the proper functioning of the air curtain.

Application

- Shopping malls
- Income halls in hotels
- Offices
- Bars

Specifications

- Available in 3 lengths - 1 m, 1,5 m and 2 m
- 3-speed motor
- Door height up to 3,2 m*
- Centrifugal fan
- Adjustable air stream: +/- 5°
- Standard colour: white (RAL 9016)
 - Option: black colour (RAL 9005), price available on request

*Vertical range of isothermal air flow (at velocity of 1,5 m/s)

Accessoires

- Touchscreen control, type **S-TOUCH**
- External control module, type **S-ECM**
- Hot water valve
 - Motorised hydraulic 2-way valve (ON/OFF), type **QCV-2**
 - Motorised hydraulic 3-way valve (ON/OFF), type **QCV-3**

Technical data										
		EASY PRO E-100	EASY PRO W-100	EASY PRO N-100	EASY PRO E-150	EASY PRO W-150	EASY PRO N-150	EASY PRO E-200	EASY PRO W-200	EASY PRO N-200
Power supply	[V/Hz]	3 x 400/50	230/50	230/50	3x400/50	230/50	230/50	3x400/50	230/50	230/50
Air flow	[m³/h]	1300	1100	1400	2200	1950	2300	3000	2850	3000
Power consumption	[kW]	5,13	0,12	0,14	9,2	0,17	0,2	12,3	0,23	0,23
Current consumption	[A]	9	0,5	0,6	13,8	0,7	0,8	18,3	1	1
Sound level ⁽¹⁾	[dB(A)]	49	50,5	49,5	46	48,5	45,5	42	46	42
IP		20	20	20	20	20	20	20	20	20
Heating capacity ⁽²⁾	[kW]	5	4,2 ⁽²⁾	-	9	7,7 ⁽²⁾	-	12	11 ⁽²⁾	-
Hydraulic connection	["]	-	1/2"	-	-	1/2"	-	-	1/2"	-
Weight	[kg]	15,1	16,2	14,7	19,6	21,5	19	24,6	26,9	23,8

(1) Acoustic pressure level measured for optimum installation height, on second step of efficiency, in the room with medium sound absorption capacity, capacity 1500 m³, at distance of 3 m from the unit


(2) inlet/outlet water temperature 40/30°C and inlet air temperature 20°C

Order example


EASY W-100

W = curtain with water heater exchanger

E = curtain with electric heaters

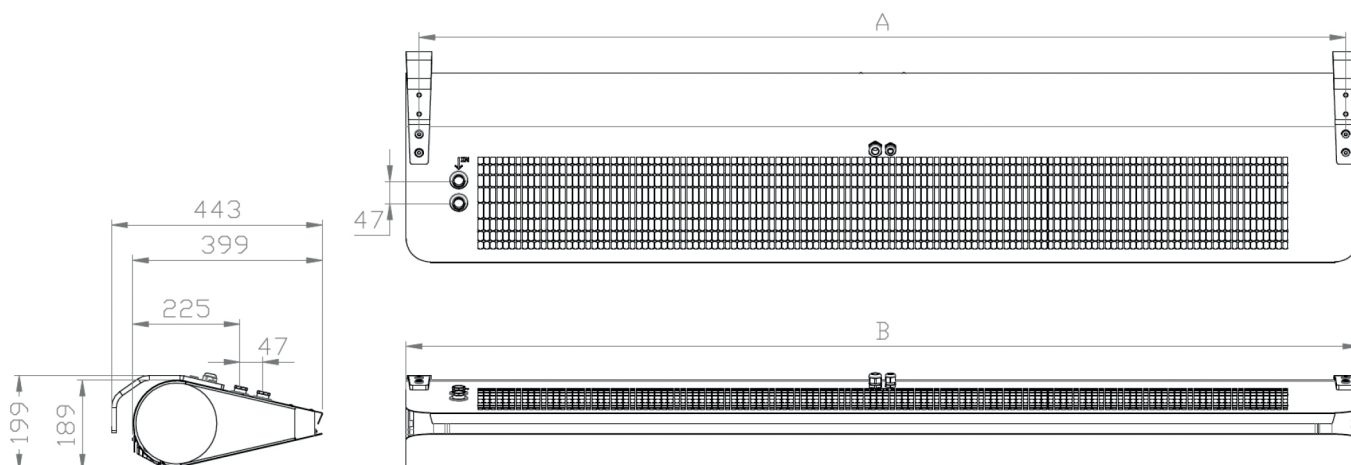

S-C

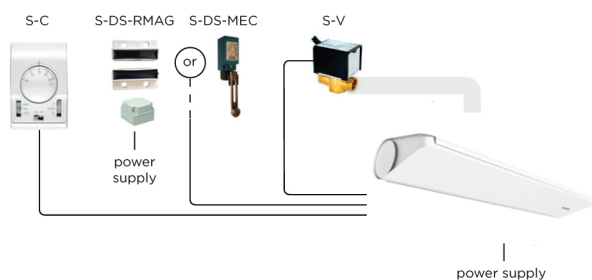

S-TOUCH

