



Aluminium wall grilles double deflection type GAC 21

Brand

- France Air

Material

- Aluminium

Colour

- Anodized natural finish
- Other colours available upon request

Composition

- Deflection: adjustable



Text for tender

- Anodized aluminium
- **FRANCE AIR** Type **GAC 21**

• **Dimensiuni**

- Gol montaj :
L x H

	GAC 10	GAC 21	GBC 10	GBC 21
A (mm)	30	40	30	45
B (mm)	6	6	6	6
C (mm)	25	25	25	25
D (mm)	15	15	20	20

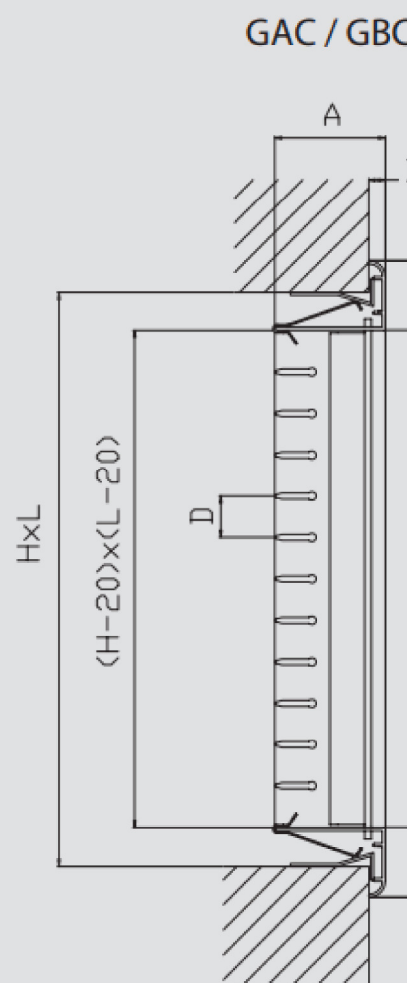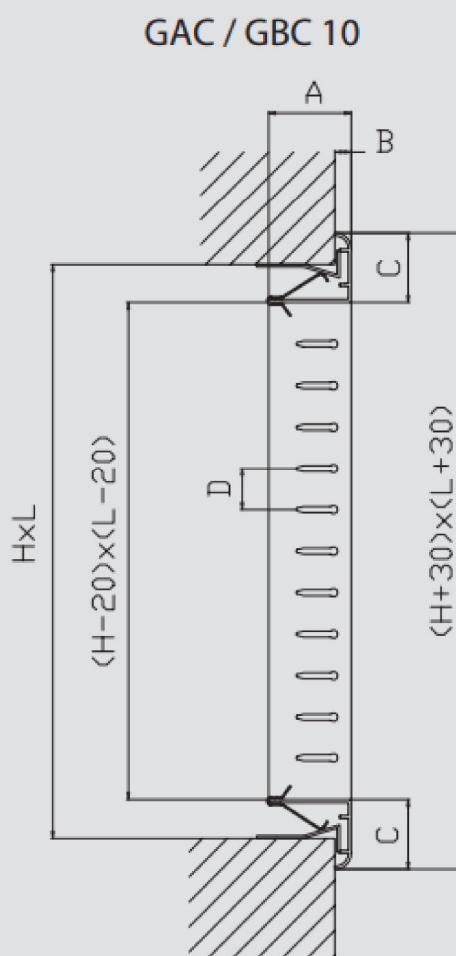

Wall and floor grilles

Quick selection																				
Debit (m³/h)	L x H Aeff (m²)	200 x 100 0,0094	250 x 100 0,0120	300 x 100 0,0147	250 x 150 0,0196	400 x 100 0,0198	300 x 150 0,0240	500 x 100 0,0250	400 x 150 0,0323	500 x 150 0,0407	400 x 200 0,0439	600 x 150 0,0494	500 x 200 0,0553	600 x 200 0,0671	800 x 200 0,0882	600 x 300 0,1053	800 x 300 0,1385	1000 x 300 0,1749		
160	X 0,25 (m)	2,9	2,6	2,3	2,0															
	NR	<20	<20	<20	<20															
	Pt (Pa)	18	11	7	4															
200	X 0,25 (m)	3,6	3,2	2,9	2,5	2,5	2,3													
	NR	<20	<20	<20	<20	<20	<20													
	Pt (Pa)	28	17	11	6	6	4													
250	X 0,25 (m)	4,5	4,0	3,6	3,1	3,1	2,8													
	NR	28	16	<20	<20	<20	<20													
	Pt (Pa)	43	26	18	10	10	7													
300	X 0,25 (m)	5,5	4,8	4,4	3,8	3,7	3,4	3,3	2,9											
	NR	37	24	21	<20	<20	<20	<20	<20											
	Pt (Pa)	63	38	25	14	14	10	9	5											
350	X 0,25 (m)	6,4	5,6	5,1	4,4	4,4	4,0	3,9	3,4	3,1										
	NR	44	31	27	19	24	<20	<20	<20	<20										
	Pt (Pa)	85	52	35	19	19	13	12	7	5										
400	X 0,25 (m)		6,4	5,8	5,0	5,0	4,5	4,5	3,9	3,5	3,4	3,2								
	NR		37	31	24	23	<20	<20	<20	<20	<20	<20								
	Pt (Pa)		67	45	25	25	17	16	9	6	5	4								
500	X 0,25 (m)			7,3	6,3	6,2	5,7	5,6	4,9	4,4	4,2	4,0	3,7							
	NR			40	32	31	24	22	<20	<20	<20	<20	<20							
	Pt (Pa)			71	40	39	27	24	15	9	8	6	5							
600	X 0,25 (m)			8,7	7,5	7,5	6,8	6,7	5,9	5,2	5,0	4,7	4,5	4,1	3,6					
	NR			46	38	38	30	29	<20	<20	<20	<20	<20	<20	<20					
	Pt (Pa)			102	57	56	38	35	21	13	11	9	7	5	3					
700	X 0,25 (m)					8,7	8,0	7,8	6,8	6,1	5,9	5,5	5,2	4,8	4,1	3,8				
	NR					44	36	34	28	24	21	<20	<20	<20	<20	<20				
	Pt (Pa)					76	52	48	29	18	15	12	10	7	4	3				
800	X 0,25 (m)					10,0	9,1	8,9	7,8	7,0	6,7	6,3	6,0	5,4	4,7	4,3				
	NR					48	41	39	33	28	25	21	<20	<20	<20	<20				
	Pt (Pa)					99	68	63	37	24	20	16	13	9	5	4				
900	X 0,25 (m)						10,2	10,0	8,8	7,8	7,6	7,1	6,7	6,1	5,3	4,9	4,3			
	NR						45	44	37	33	30	25	21	<20	<20	<20	<20			
	Pt (Pa)						86	79	47	30	26	20	16	11	6	4	3			
1000	X 0,25 (m)							11,1	9,8	8,7	8,4	7,9	7,5	6,8	5,9	5,4	4,7	4,2		
	NR							47	41	37	34	29	25	<20	<20	<20	<20	<20		
	Pt (Pa)							98	58	37	32	25	20	14	8	5	3	2		
1200	X 0,25 (m)								11,7	10,5	10,1	9,5	9,0	8,1	7,1	6,5	5,7	5,0		
	NR								48	43	40	36	31	21	<20	<20	<20	<20		
	Pt (Pa)								84	53	46	36	29	19	11	8	5	3		
1400	X 0,25 (m)									12,2	11,7	11,1	10,5	9,5	8,3	7,6	6,6	5,9		
	NR									49	46	41	37	26	22	<20	20	<20		
	Pt (Pa)									72	62	49	39	27	15	11	6	4		
1800	X 0,25 (m)											14,2	13,5	12,2	10,7	9,8	8,5	7,6		
	NR											51	46	35	30	<20	<20	<20		
	Pt (Pa)											81	65	44	25	18	10	6		
2000	X 0,25 (m)												15,0	13,6	11,8	10,8	9,5	8,4		
	NR												50	39	33	22	22	<20		
	Pt (Pa)												80	54	31	22	13	8		
2500	X 0,25 (m)													17,0	14,8	13,5	11,8	10,5		
	NR													47	39	32	26	29		
	Pt (Pa)													85	49	34	20	12		
3000	X 0,25 (m)														17,8	16,3	14,2	12,6		
	NR														45	40	29	27		
	Pt (Pa)														70	49	29	18		
3500	X 0,25 (m)															19,0	16,5	14,7		
	NR															46	32	30		
	Pt (Pa)															67	39	24		
4000	X 0,25 (m)																18,9	16,8		
	NR																34	32		
	Pt (Pa)																51	32		