



Steel roof hoods type CT

Steel roof hoods

Brand

- Cairox

Application

- Roofpassage for exhaust (or air intake) in ventilation systems
- Only for use on roof with tiles or slates

Material

- Galvanized steel, with red or anthracite grey finished hood and lead flashing

Colour

- Red, RAL 3009
- Anthracite grey, RAL 7016

Composition

- Weather resistant hood with birdscreen, made of steel
- Duct connection in galvanized steel
- Lead flashing for weather resistant mounting

Mounting

- Provided with lead flashing for mounting on enclined roofs with inclination between 5° and 45°
- Equipped with round duct connection
- Higher air volumes as being mentionned should be avoided

Text for tender

- The air intake or exhaust shall be effectuated through a steel roof hood supplied with integrated lead flashing and birdscreen
- Finish Red, RAL 3009 or Anthracite grey , RAL 7016 according to the roof finish
- Type **CT**

Order example

■ CT, GRAY, 200




Explanation

CT = Type roof cap

GRAY = Color of the cap

200 = Connection diameter

Pressure loss

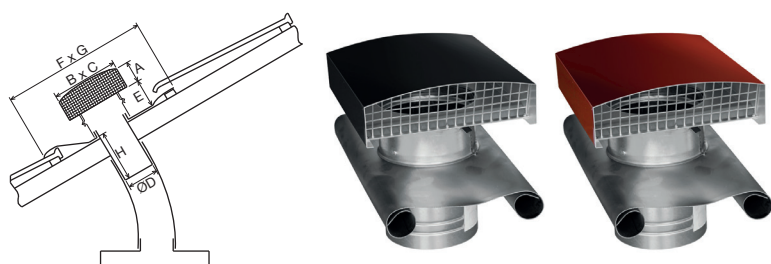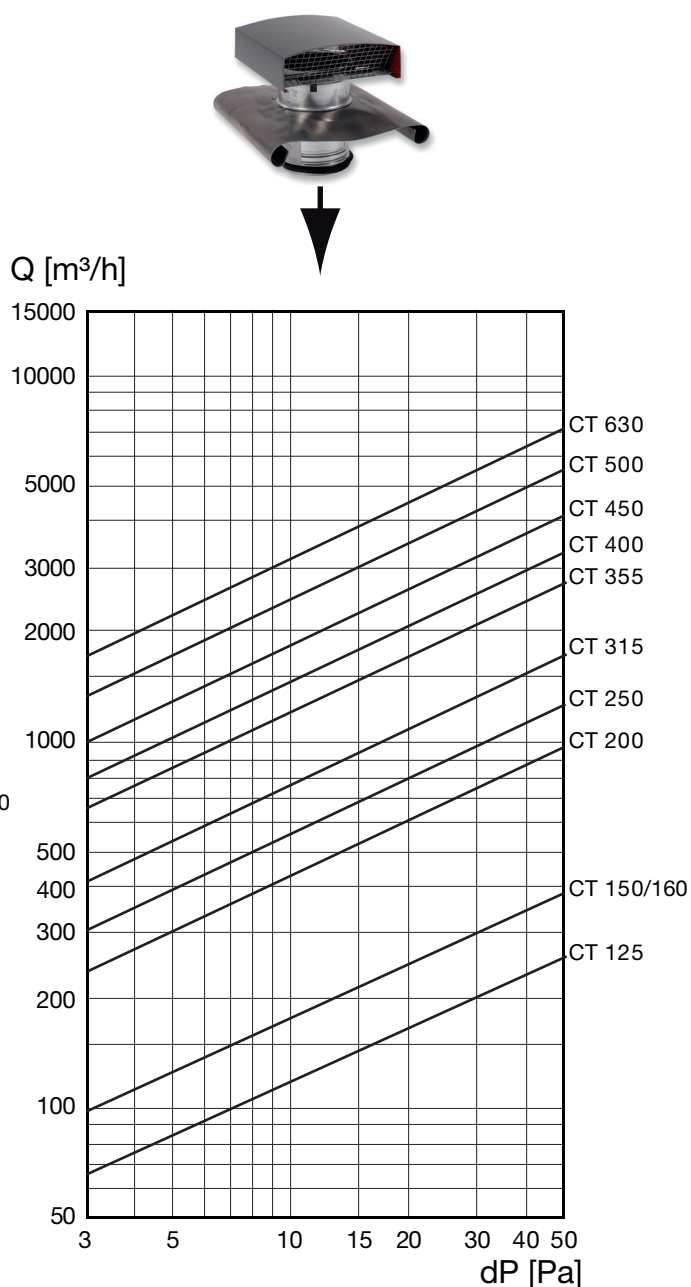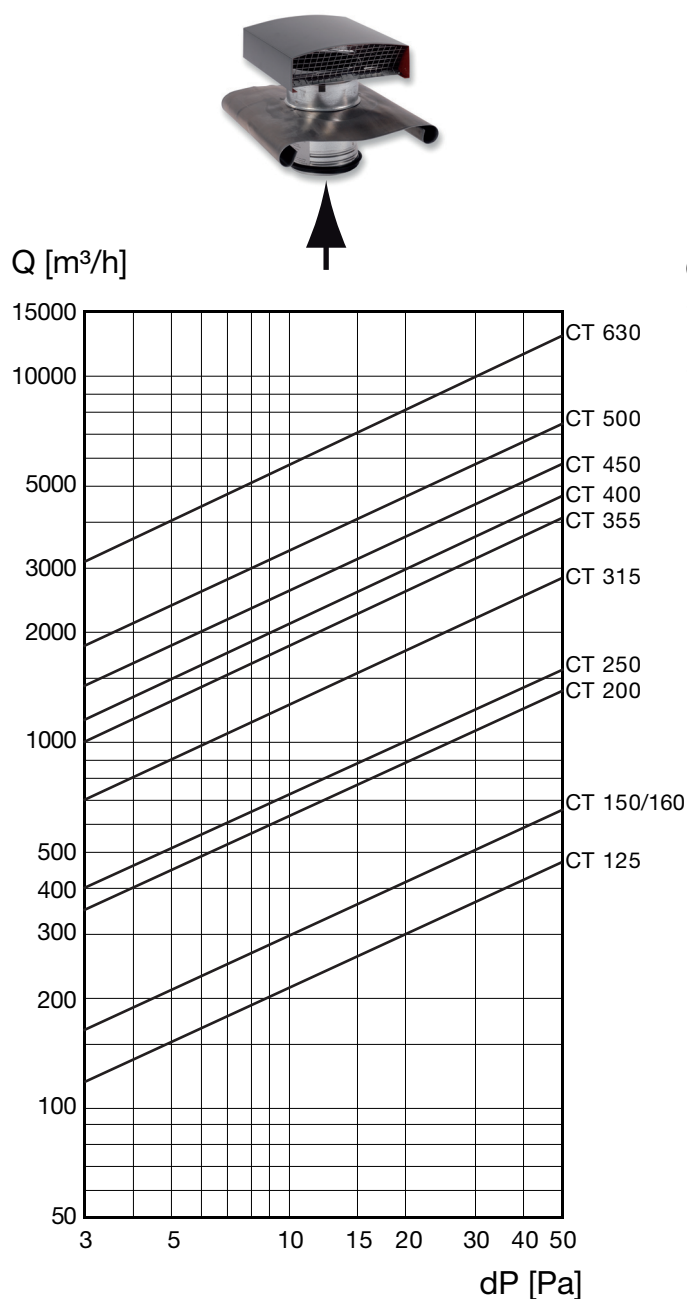

Roof caps

Dimensions									
	A [mm]	B [mm]	C [mm]	ØD [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Ak [m ²]
CT 125	54	200	250	125	70	500	400	175	0,019
CT 150	65	248	300	150	70	500	400	175	0,033
CT 160	65	248	300	160	70	500	400	175	0,033
CT 200	100	333	400	200	85	600	600	160	0,058
CT 250	100	333	400	250	85	600	600	160	0,058
CT 315	112	420	500	315	85	600	600	140	0,085
CT 355	200	550	660	355	150	900	750	225	0,185
CT 400	200	550	660	400	150	900	750	225	0,185
CT 450	200	550	660	450	150	900	750	225	0,185
CT 500	245	650	850	500	160	1200	1000	215	0,24
CT 630	320	780	1000	630	160	1200	1000	215	0,393